MOUNTING SUGGESTIONS

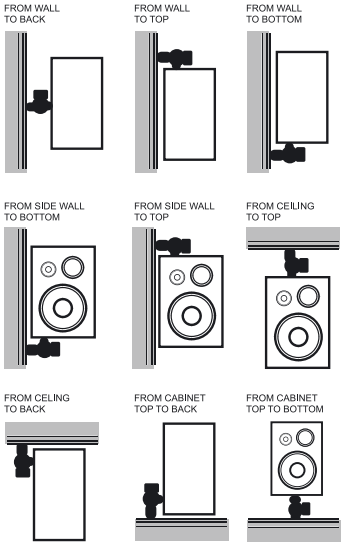
FROM WALL TO BACK
FROM WALL TO TOP
FROM WALL TO BOTTOM
FROM SIDE WALL TO BOTTOM
FROM SIDE WALL TO TOP
FROM CEILING TO TOP
FROM CELING TO BACK
FROM CABINET TOP TO BACK
FROM CABINET TOP TO BOTTOM

FIXING SUGGESTIONS

GENERAL PURPOSE

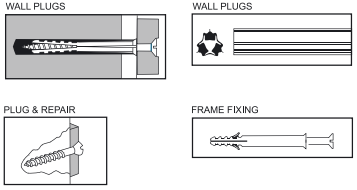

CAVITY FIXING

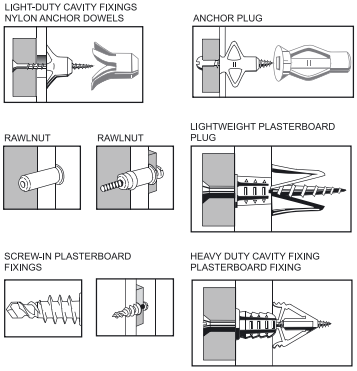



TT-2

Speaker Brackets

INSTRUCTION MANUAL

REV: 1/093/1.0

© Acoustic Solutions Ltd 2003, all rights reserved.
Specifications are subject to change without notice. E&OE.

TT-2 Speaker Brackets

May we take this opportunity to thank you for purchasing TT2 Speaker Brackets. We strongly suggest that you carefully study these assembly instructions before attempting to assemble the unit, and that you observe the listed precautions.

PARTS LIST

A. 2 x threaded knob



B. 2 x speaker fixing



C. 2 x wall fixing

WARNING
Screwing the TT2 bracket to your speakers may invalidate your speaker warranty. Please check with your speaker manufacturer. This does not affect your statutory rights.

ASSEMBLY METHODS

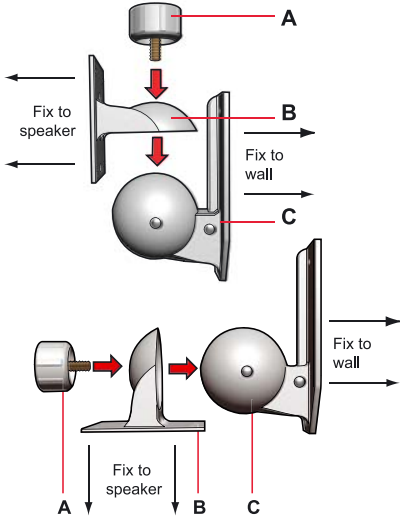

IMPORTANT
Ensure that fixings do not affect the functionality of the speaker. Correct mounting of the TT2 bracket is very important to the safety of your equipment and yourself. Please take note of information on this sheet, if you are in doubt please seek advice.

SPEAKER FIXING

Please note: screw fixings not included

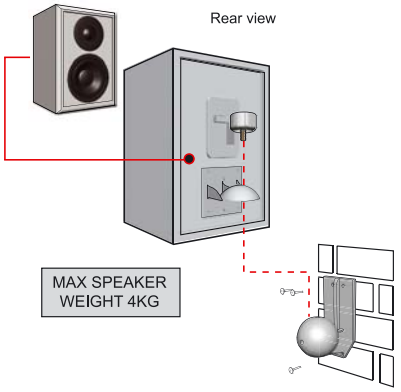

The TT2 bracket is rated at holding speakers weighing 4KG MAX. This guide is only as good as the fixing method. It is advised that traditional fixings for plasterboard, lath or plaster walls can reduce the safe fixing load of the bracket. Please seek advice on the fixing that you choose. The bracket fixing hole diameter is 4mm.

CONTACT DETAILS

Contact the Acoustic Solutions Helpline on 01327 340601 for any replacement items. This line is manned from 9:00am until 1:00pm and 2:00pm until 4:30pm, Monday to Friday.

Acoustic Solutions Ltd.
Grand Union Buildings, 54 High Street, Weedon, Northampton.
NN7 4QD. UK
www.acousticsolutions.co.uk
email: enquiries@acousticsolutions.co.uk